

INSTALLATION INSTRUCTIONS: REALTRUCK BACKRACK KIT #40127 2002-2016 Dodge 6.5 & 8ft Beds

## **READ THIS NOW!**


Your truck should look like the one shown. If you think you are missing any parts, think that this part number is not for your truck or have any installation question, call our customer service department at toll free:

888-588-6101or locally 800-265-8137.
Other ways to reach RealTruck Backrack:
email: info@backrack.ca
Support@backrack.com



The RealTruck Backrack is secured to your truck with a pair of "Stake Pocket Bolts" specifically designed for your make and model of truck. These bolts mount into each of the two front stake pockets. The RealTruck Backrack assembly sits on the bed rails of your truck and is secured to these Stake Pocket Bolts. If your truck has a BEDLINER we suggest you remove it to install the Stake Pocket Bolts

#	PART	DESCRIPTION	QTY
1	INST207	Installation Instructions	1
2	SBY617S	Stake Pocket Bolt	2
3	FYZ008	1/2"-20 Nylon Hex Lock Nut	2
4	FYZ011	1/2" Flat Washer	2
5	FYZ014	1/2"-20 x 3.25" Carrige Bolt Grade 8	2
6	FYZ016	5/8"-11 Hex Nut	2
7	FYZ017	5/8" Lock Washer	2
8	FYZ018	5/8" Flat Washer	2
9	FYZ019	3/4"-10 Jam Nut	2
10	FYZ020	3/4" Lock Washer	2
11	FYZ021	3/4" Flat Washer	2
12	FYZ022	3/4" Large Flat Washer	2
13	DB9X8ET	Poly Bag	1
14	SF004	Foam Pad	4
15	SF005	2 Sided Tape SPGPSA1x2x2	4
16	Small BACKRACK Decal	BACKRACK DECAL 5/8" x 9"	2
17	RP427D	40127 Rail Plate Driver	1
18	RP427P	40127 Rail Plate Passenger	1
19	RMB503D	Rail Mount Bracket Driver	1
20	RMB503P	Rail Mount Bracket Passenger	1
21	TCA003D	Tonneau Cover Adapter Driver	1
22	TCA003P	Tonneau Cover Adapter Passenger	1

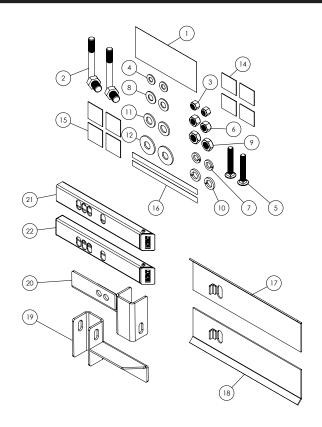







## REALTRUCK BACKRACK

Apply double sided adhesive pads to this side of rail plate (driver and passenger) 1 on each end, approximately center.

Remove 2nd side in step 4 to adhere to truck rail.




Apply single sided adhesive pads to this side of spacer.
Apply RealTruck
Backrack decal
\*\*Can also be applied as last step to ensure facing outward\*\*



1a


Insert stake pocket bolt, fasten as shown with supplied washers and nuts. Make sure the stake pocket bolt is correctly inserted into opening on truck bed.
Hand tighten until final step.



2


Fasten RealTruck Backrack to the Rail mount bracket. Finger tighten at this stage.

\*\*IMPORTANT\*\* Install
the carriage
bolt as shown in the
diagram with the
round head closest to
the cab. Failure to do
so could result in
damage to the cab of
rear window.




1b

Using a rotary tool or sharp knife, carefully cut driver and passenger rail cap to expose stake pocket



3

Fasten RealTruck
Backrack Assembly to
the Stake pocket bolt as
shown. Center the
RealTruck Backrack
assembly on the truck
and final torque all bolts
starting with the nuts on
the inside of the truck
bed, then the rail mount
bracket and finally the
main RealTruck
Backrack carriage bolt.



4